

6.2.2 Roles

The hierarchical relationships between the various organisations and individuals undertaking and accountable for Temporary Traffic Management is shown in the figure below. The Principal Contractor remains accountable for all aspects of safety at a worksite while all parties and organisation have a responsibility for safety. The roles are described in further detail in the sub-headings below.

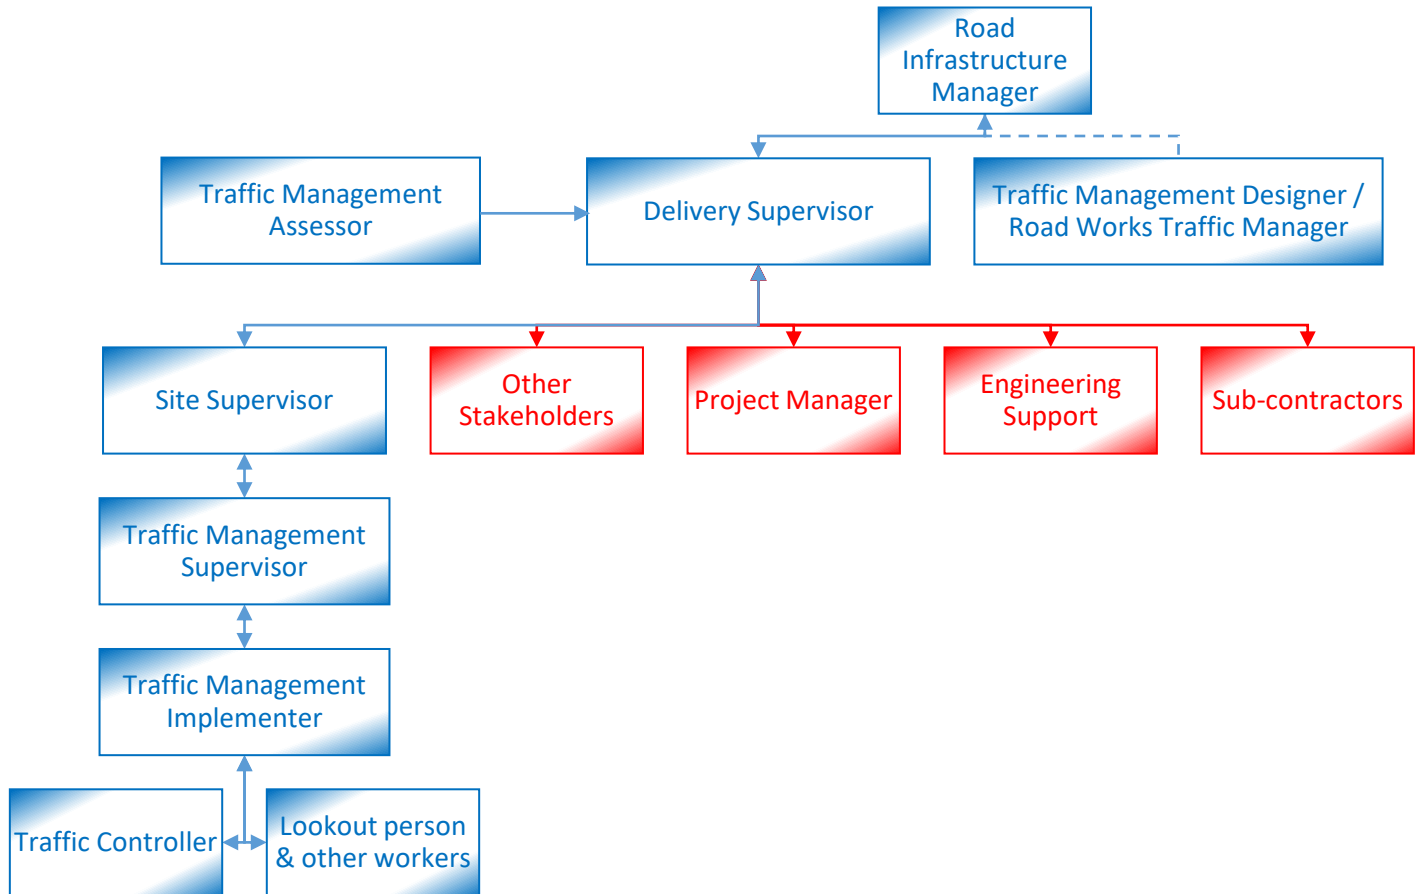


Figure 4: Temporary Traffic Management Functional Roles – AGTTM Part 8 Figure 5.1

6.2.2.1 Road Infrastructure Manager

The Road Infrastructure Manager has a statutory duty to ensure so far as reasonably practicable the safe and efficient operation of the road network under their authority. Refer to AGTTM Part 8 Processes and Procedures Table 5.3 for the required responsibilities of the Road Infrastructure Manager.

6.2.2.2 Traffic Management Designer

The Traffic Management Designer is responsible for the following:

- Designing and drafting the Traffic Management Plan, including all associated Traffic Guidance Schemes, to be compliant with legislative requirements.
- Ensuring that the scenarios provided will protect both workers and public.
- Developing the Traffic Management Plan and associated Traffic Guidance Schemes to accommodate changes to the scope or updates to the standards.