



SCENARIO 1:

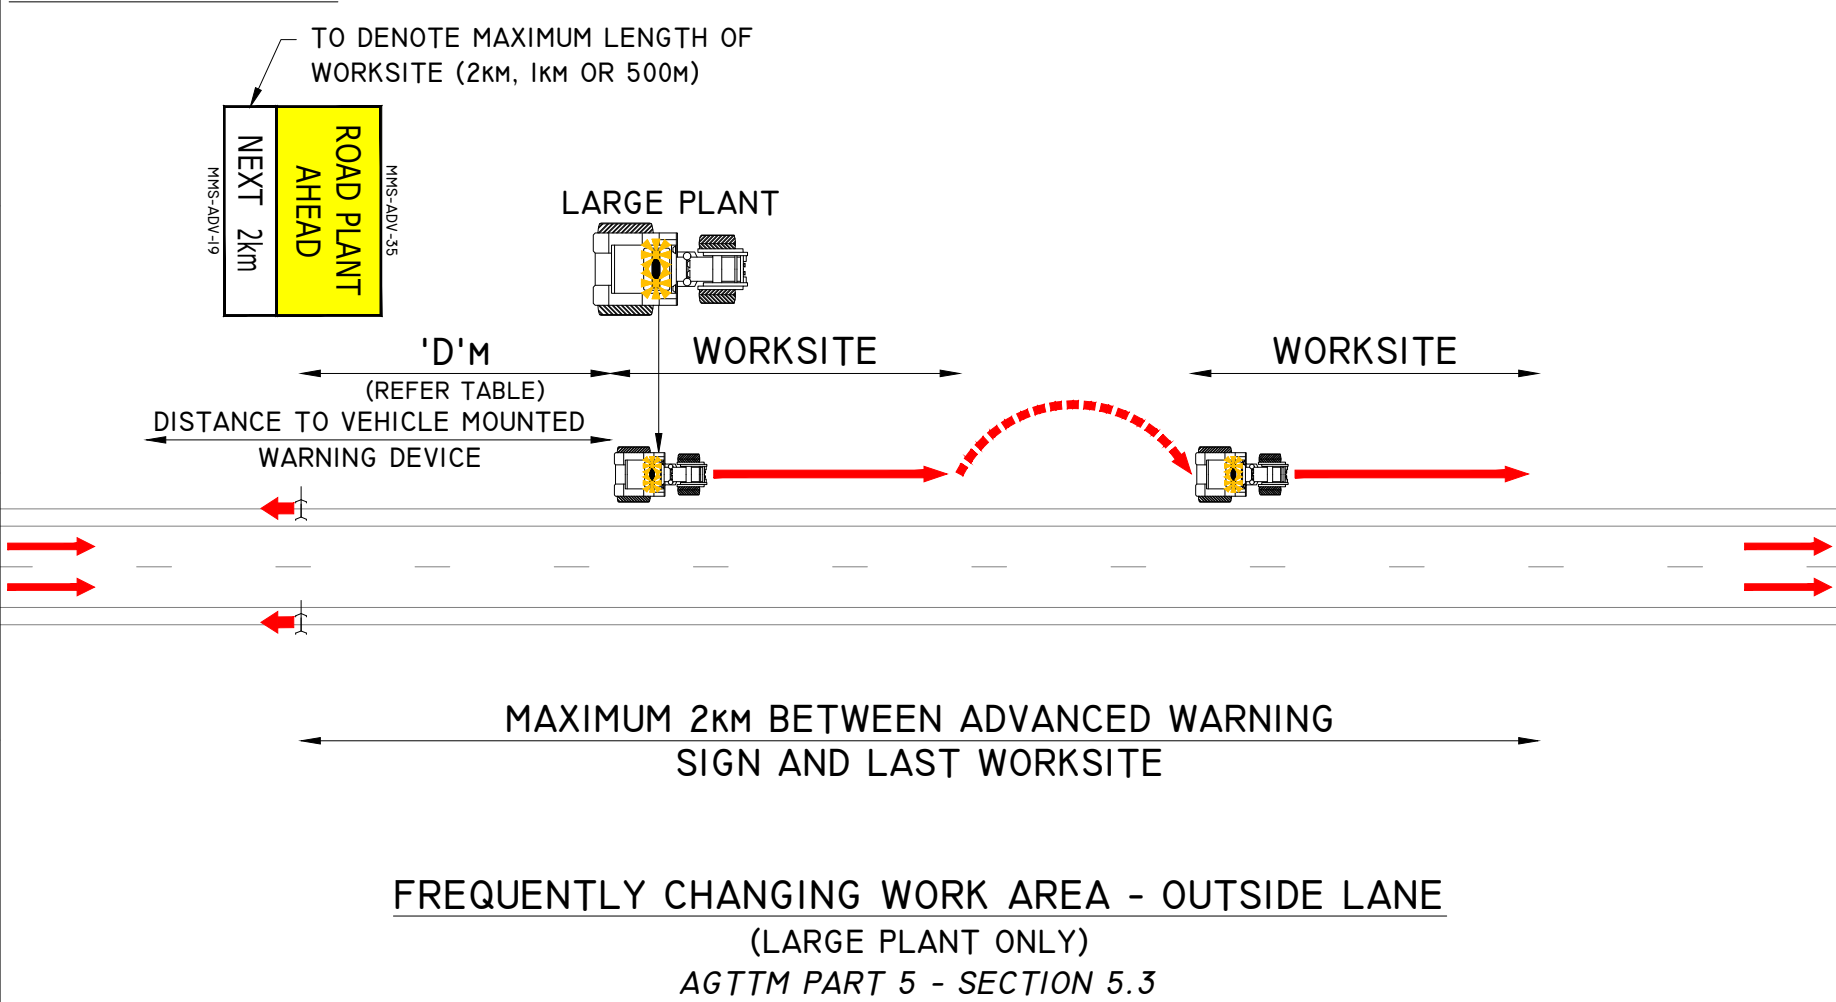

SCENARIO 2:

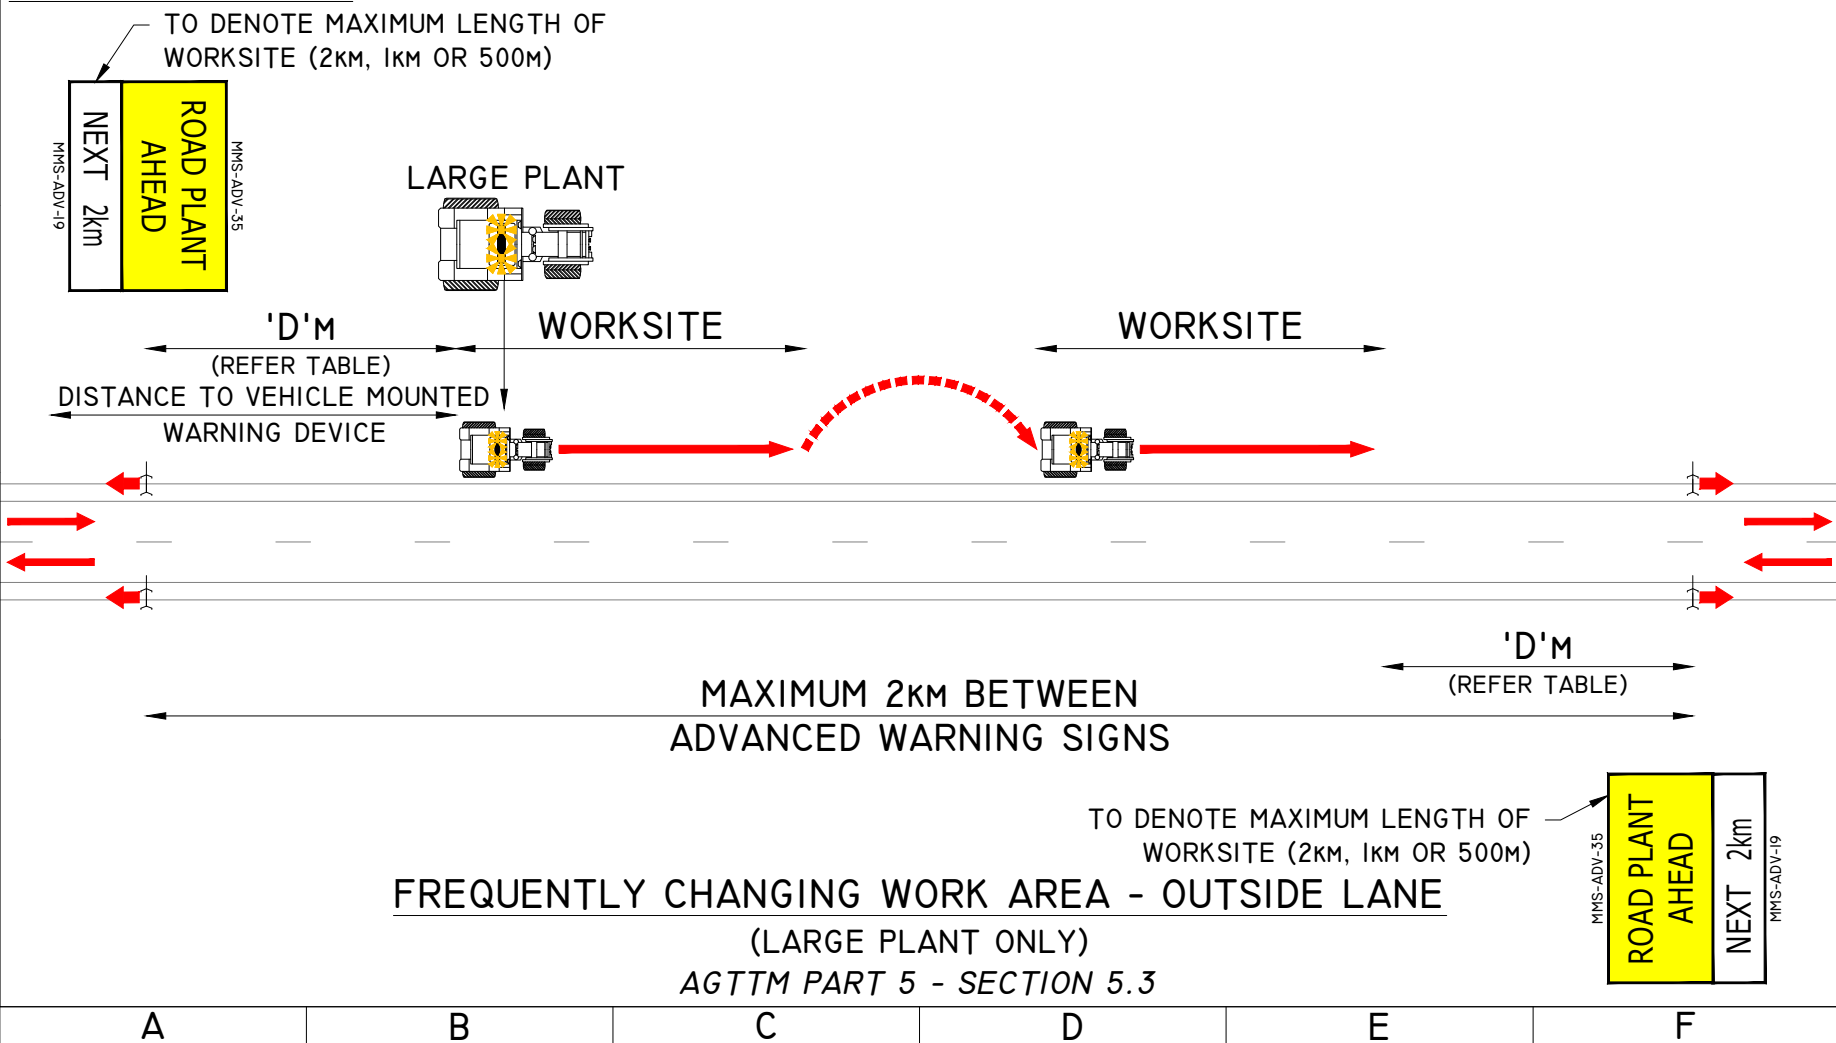

SCENARIO 1:

MULTI-LANE ROAD (WORKERS ON FOOT)

SCENARIO 2:

TWO-WAY CARRIAGEWAY (WORKERS ON FOOT)

NOTES

- VEHICLES MUST BE EQUIPPED WITH A VEHICLE MOUNTED WARNING DEVICE.
- THE VEHICLE MOUNTED WARNING DEVICE SHALL BE MOUNTED AS HIGH AS PRACTICABLE AND NOT BE OBSCURED, E.G BY OVERHANGING VEGETATION OR A RAISED TRUCK BODY.
- THE FOLLOWING MUST BE ADHERED FOR FREQUENTLY CHANGING WORK AREA:
 - THE WORK AREA IS OUTSIDE OF TRAFFIC LANES.
 - WORKS MOVE FREQUENTLY BETWEEN SUCCESSIVE LOCATIONS.
 - THE MAXIMUM WORK PERIOD AT ANY ONE LOCATION IS:

FOR TRAFFIC SPEEDS 70km/h OR LESS:

 - 20 MIN AT ANY TRAFFIC VOLUME.
 - 40 MIN AT TRAFFIC VOLUMES OF 150vph OR LESS.
 - 1 HOUR AT TRAFFIC VOLUMES OF 40vph OR LESS.

FOR TRAFFIC SPEEDS GREATER THAN 70km/h (WITHIN 1.2M):

 - 20 MIN IF THERE ARE LARGE PLANT ITEMS ONLY.

FOR TRAFFIC SPEEDS 70km/h OR LESS (OUTSIDE 1.2M):

 - 20 MIN FOR ALL SCENARIOS.
 - THERE IS A MINIMUM SIGHT DISTANCE FROM APPROACHING ROAD USERS TO THE VEHICLE MOUNTED WARNING DEVICE OF:
 - 150M IF THE SPEED IS 60km/h OR LESS.
 - 250M IF THE SPEED IS MORE THAN 60km/h.
 - FOR SCENARIOS WHERE THERE ARE WORKERS ON FOOT, REFER TO TGC-TMC-STLI-014.
 - PRIOR TO EQUIPMENT OR MATERIALS BEING BROUGHT INTO THE WORK AREA, A DRIVE THROUGH CHECK OF THE WORKSITE TRAFFIC MANAGEMENT SETUP SHOULD BE MADE IN ALL DIRECTIONS, INCLUDING SIDE ROADS.
 - PRIOR TO COMMENCEMENT OF WORKS, A RISK ASSESSMENT MUST BE UNDERTAKEN TO ENSURE THE WORKS CAN BE COMPLETED SAFELY. REFER TO THE TMP FOR RISK CONSIDERATIONS PRIOR TO SETUP. THE WORKS VEHICLE LOCATION MUST CONSIDER THE IMPACT ON VULNERABLE ROAD USERS AND CYCLISTS. THE WORK VEHICLE MUST BE LOCATED WITHIN 40M OF THE PROPOSED WORKS.

DOCUMENTATION

DAILY RECORDS OF THE SITE LAYOUT INCLUDING DEVICES, SIGHT DISTANCE, RISK ASSESSMENTS, SIGNS OR TGS, MUST BE KEPT IN A DIARY OR IN WORK SHEETS (DAILY DAIRY). ANY SIGNIFICANT DEPARTURES FROM, OR ADDITIONS TO, THE SIGNS AND DEVICES INCLUDED IN THIS DIAGRAM SHOULD BE NOTED AND APPROVED.

TABLES

SIGN SPACING

AGTTM PART 3 - TABLE 2.2

SPEED LIMIT (KM/H)	DISTANCE ('D') (M)
55 OR LESS	15
56 TO 65	45
GREATER THAN 65	EQUAL TO SPEED OF TRAFFIC IN KM/H

MINIMUM SIGHT DISTANCE TO VEHICLE MOUNTED WARNING DEVICE - NO SPOTTER

AGTTM PART 5 - TABLE 4.2

SPEED LIMIT (KM/H)	DISTANCE (M)
≤45	225
46-55	275
56-65	335
66-75	390
76-85	445
86-95	500
96-110	555
>110	SPOTTER REQUIRED

WORK TASK ≤ 10 SECONDS. WORKER TO FACE ONCOMING TRAFFIC.

LEGEND

EXISTING ROAD



METROPOLITAN REGIONS
TRAFFIC MANAGEMENT BRANCH

WATERLOO CRESCENT
TELEPHONE (08) 138 138

EAST PERTH 6004

DATE OF DRAWING 2025 JULY	SCALE -
LOCAL GOVERNMENT AUTHORITY -	POSTED SPEED -
ROAD AUTHORITY MRWA	WORKSITE SPEED -
CHECKED BY TYLER HARTLEY	SIGNATURE
ACCREDITATION RTM-0066	
DESIGNED BY MICHAEL REED	SIGNATURE
ACCREDITATION AWTM-23-11536-02	

GENERIC TRAFFIC GUIDANCE SCHEME
SHORT TERM LOW IMPACT
FREQUENTLY CHANGING WORK AREA
OUTSIDE OF TRAFFIC LANES

DRAWING NO 0922-01531-STLI-015	REVISION 6
-----------------------------------	---------------