


Figure 2.5.3(a) – Sign spacing tolerances

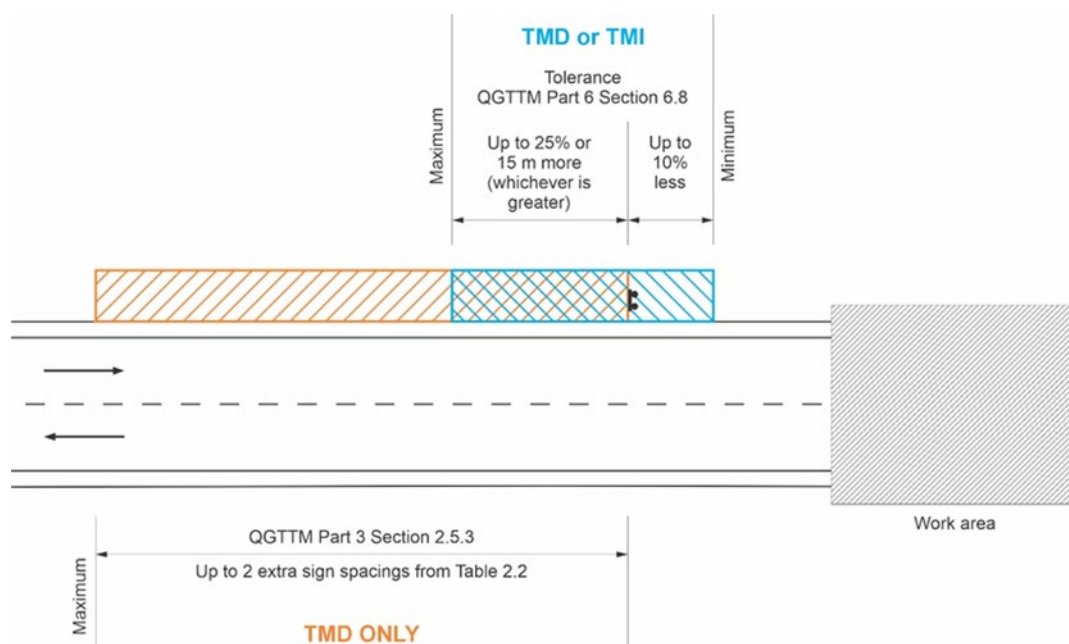

Replace:

Signs required for works which will be in progress for longer than 14 days may be installed in a more permanent manner on posts sunk into the ground. Check that underground utilities are not located below and making holes is approved by the relevant road authority. Ensure regular site inspection, maintenance and securing practices occur in these circumstances. In these situations, the installation height of all temporary signs mounted in a permanent manner must be based on the principles illustrated in AS 1742.2.

with:

While any sign may be installed in a permanent manner on posts sunk into the ground, it is recommended that signs required for works which will be in progress for longer than 14 days (that are not exclusively targeting pedestrians) should be installed in a permanent manner on posts sunk into the ground. Check that underground utilities are not located below and making holes is approved by the relevant road authority. Ensure regular site inspection, maintenance and securing practices occur in these circumstances. In these situations, the installation height of all temporary signs mounted in a permanent manner must be based on the principles illustrated in AS 1742.2 requirements in AGTTM Part 6 Section 6.6.1 and AS 1742.3 clause 4.3.2. Signs directed exclusively towards pedestrians must be installed at a height which will enable signs to be viewed easily by pedestrians (see QGTTM Part 6 Section 6.6.1).